



## FLEXYLED AT6

Domus Line  
design

**Milky flexible LED modules  
for recessed or on surface installation**

**Materials:**

flexible LED strip with adhesive

**Covering:**

milky-effect silicone

**Light source:**

UHE LED module (276 LED/m)

**Wiring:**

2000mm



**Application type:**

universal



**Installation:**

recessed or on surface

**FLEXYLED AT6** is a 24Vdc flexible linear LED strip developed using a new **milky-effect diffusing silicone coating** technology that cancels the characteristic spot effect light emitting diodes. **FLEXYLED AT6** has a high-seal 3M® adhesive base, and can be installed in grooves or on surfaces. Available in three pre-wired modules (200, 300 and 600 cm) wired with double power cable.




**Colour appearance** natural white  
**Colour temperature** 4000 Kelvin  
**Luminous efficiency** 50 lm/W  
**CRI** Ra ≥ 90



**Colour appearance** super warm white  
**Colour temperature** 2700 Kelvin  
**Luminous efficiency** 50 lm/W  
**CRI** Ra ≥ 90

\* values referring to FLEXYLED AT6 1000mm

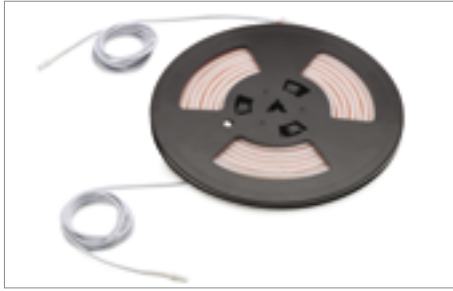

**FLEXYLED AT6**



CE IP44

276 LED/m LED module - with double power cable

Code	Length	Watt & Volt
1510401_*/200	2000mm	20W @ 24Vdc
1510401_*/300	3000mm	30W @ 24Vdc
1510401_*/600	6000mm	60W @ 24Vdc



Code	Light colour*
N	natural white
B1	super warm white

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

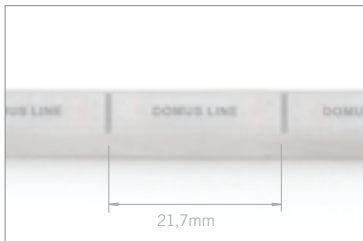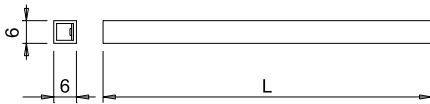

**MODULARITY**

**FLEXYLED AT6** can be divided at 21,7 mm intervals. The double power cable configuration allows the cut part of any of the original modules to be recovered.

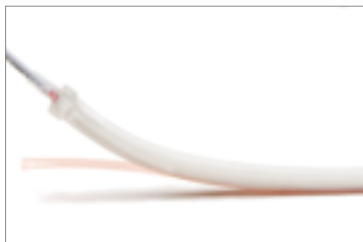

**FLEXYLED AT6** is supplied with a high-strength 3M® adhesive base and also with **hooks and fixing screws**.



**Protection rating IP44**

Protected from solid bodies greater than 1.0 mm. Protected against water splashes. The protection refers only to the luminaire and not to the connection system.

**TECHNICAL DATA**

<b>Power</b>	see table
<b>Power supply</b>	24Vdc
<b>LEDs/metre</b>	276
<b>Divisibility</b>	21,7mm
<b>Cable</b>	2000mm
<b>Protection</b>	IP44
<b>Adhesive 3M®</b>	yes

For LED converters and accessories consult the **Domus Extra catalogue** also available on [www.domusline.com](http://www.domusline.com).

